

# Model 122 Industrial Combustion Regulators

## Construction and Design Features

### Model 122 Industrial Combustion Regulators

For an unbeatable combination of capacity, performance and economy, install the Sensus Model 122 industrial combustion-type gas pressure regulator.

Streamlined body passages provide large capacity. Carefully engineered internal sensing produces accurate pressure control without an external control line. And, just in case a particular application necessitates one, a handy tap on the 122 makes connection into an external control line a simple matter.

Diaphragm cases are high strength, corrosion resistant die-cast aluminum alloy. This makes a better looking regulator at a better price. In addition, on 1" through 2½" sizes a large area double acting damper in the vent assures fast speed of response while maintaining stability, which is just the thing for those troublesome "snap-acting" loads.

Soft seats plus a precision machined "knife-edge" orifice provide positive tight shutoff, and the orifice is removable.

### Maximum Inlet Pressure Is 15 psig

Outlet pressure is easily adjusted throughout a range of inches w.c. to 2 psig. The springs are color coded for easy identification.

### Temperature Limits

Model 122 regulators can be used for temperatures from -20°F to +150°F.

### Buried Service

These regulators are designed for above ground or vault installations and are not recommended for direct earth burial.

### Periodic Inspection

Regulators are pressure control devices with numerous moving parts subject to wear that is dependent upon particular operating conditions. To assure continuous satisfactory operation, a periodic inspection schedule must be adhered to with the frequency of inspection determined by the severity of service and applicable laws and regulations.

### Maximum Emergency Pressures

The maximum inlet pressure that a Model 122 regulator may be subjected to under abnormal conditions without causing internal damage is 20 psi.

The maximum pressure the diaphragm may be subjected to under abnormal conditions without causing internal damage is set-point plus 2 psi. Set-point is defined as the outlet pressure that a regulator is adjusted to deliver.

If either of the above limits is exceeded then the regulator must be taken out of service and inspected. Damaged or otherwise unsatisfactory parts must be repaired or replaced before returning the regulator to service.

The maximum pressure that can be safely contained by the diaphragm case on a Model 122 regulator is 5 psi. Safely contained means no leakage as well as no bursting.


Before using any of the above data, make sure this entire section is clearly understood.

## Outlet Pressure Ranges and Springs – Standard Regulator

SIZE	OUTLET PRESSURE RANGE	SPRING COLOR	SPRING PART NUMBER	NOMINAL DIAPHRAGM SIZE
1" and 1¼" Model 122-8	1½" to 3½" w.c.	Blue-black Black	143-82-021-01 (main spring) 143-41-021-00 (counter spring)	8"
	1½" to 12" w.c.	Green-black Black	143-82-021-02 (main spring) 143-41-021-00 (counter spring)	
	3½" to 6½" w.c.	Red-black	143-82-021-00	
	5" to 8½" w.c.	Blue-black	143-82-021-01	
	6" to 14" w.c. 12" to 28" w.c. 1 psi to 2 psi	Green-black Green Orange	143-82-021-02 143-16-021-05 143-16-021-06	
1½", 2" and 2½" Model 122-12	1½" to 3½" w.c.	Red Red-black	143-16-021-03 (main spring) 121-10-021-50 (counter spring)	12"
	1½" to 12" w.c.	Maroon Red-black	121-42-021-00 (main spring) 121-10-021-50 (counter spring)	
	3½" to 6½" w.c.	Red	143-16-021-03	
	5" to 8½" w.c.	Blue	143-16-021-04	
	6" to 14" w.c. 12" to 28" w.c. 1 psi to 2 psi ½ psi to 2 psi	Green Orange Black Cadmium	143-16-021-05 143-16-021-06 143-16-021-07 143-16-021-08	

### 122-12 Standard Regulator with Internal Control

(See IN-G-REG-1329-0312-01-A for Other Variations)

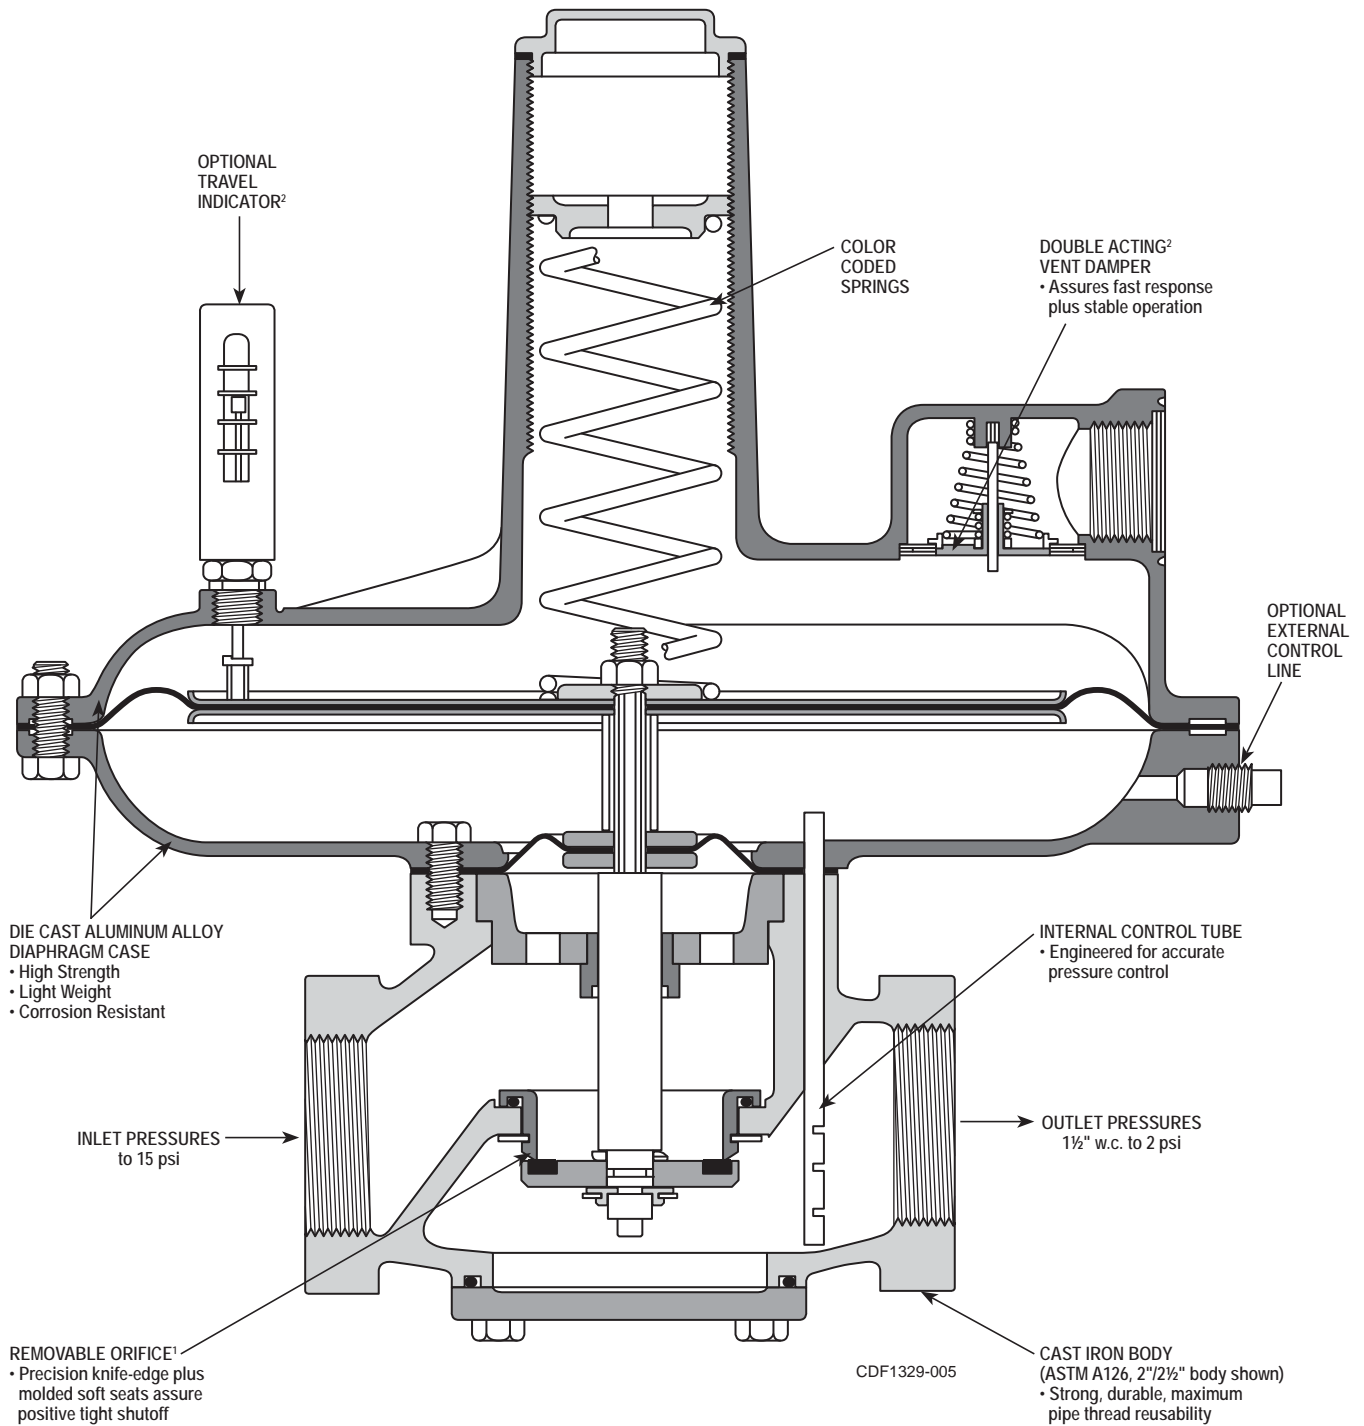


<sup>1</sup>Construction shown is for 1½", 2" and 2½" pipe sizes. Orifice in ¾", 1" and 1¼" pipe size is screwed-in.

<sup>2</sup>Applies to 1", 1¼", 1½", 2" and 2½" pipe sizes.

### Typical Performance Curves

Pressure label for each curve is INLET PRESSURE.

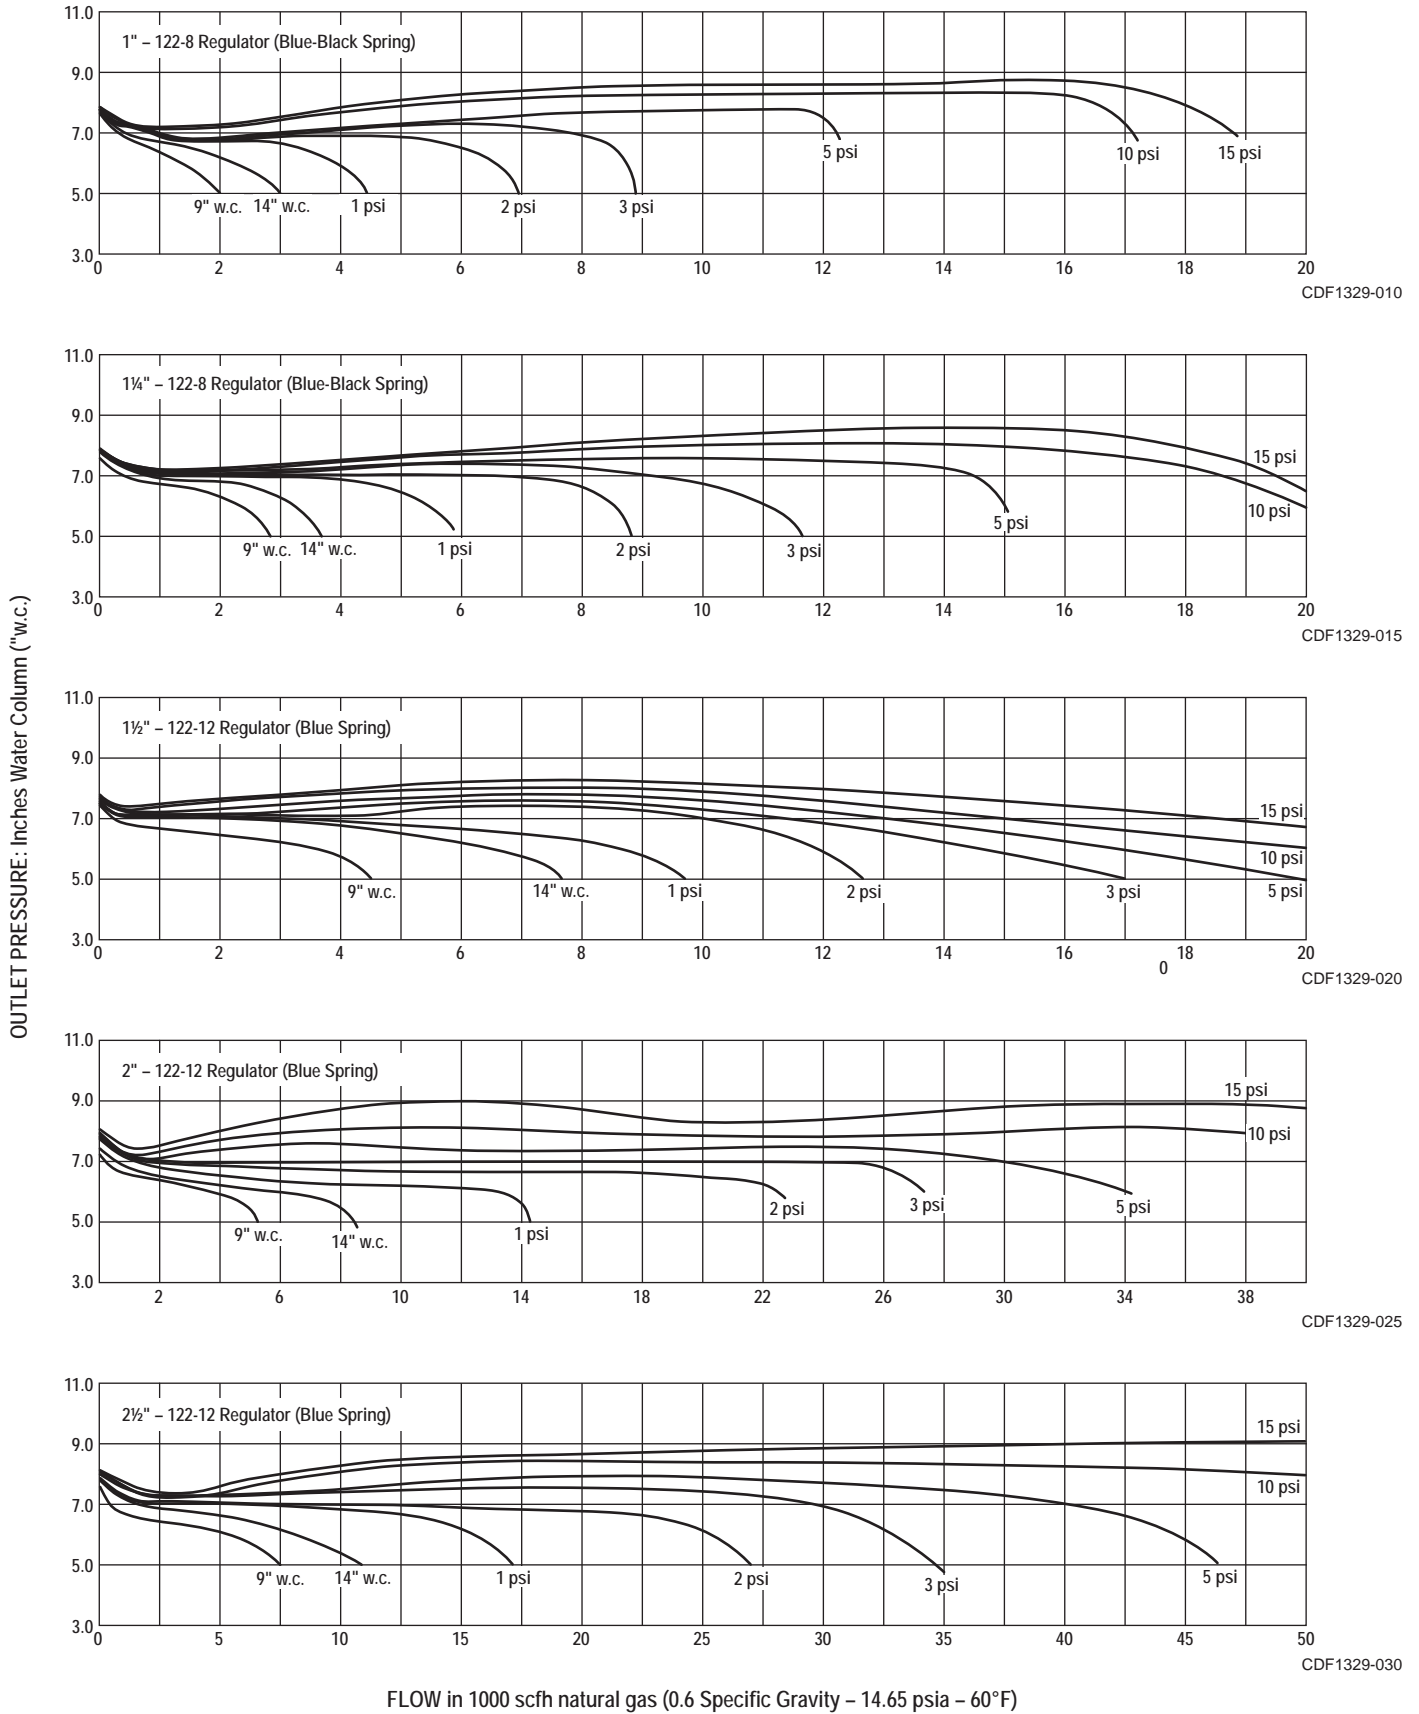

**Capacity in SCFH of Natural Gas** (0.6 Specific Gravity – 14.65 psia – 60°F)

INLET PRESSURE	SET POINT 5" w.c.	SET POINT 7" w.c.	SET POINT 11" w.c.	SET POINT 18"	SET POINT 28" w.c.	SET POINT 2 psi	REGULATOR SIZE AND MODEL
	RED/BLACK SPRING 1" w.c. DROOP	BLUE/BLACK SPRING 1" w.c. DROOP	GREEN/BLACK SPRING 2" w.c. DROOP	GREEN SPRING 2" w.c. droop	GREEN SPRING 3" w.c. DROOP	ORANGE SPRING ¼" psi DROOP	
8" w.c.	1550	1000	-	-	-	-	1" Model 122-8
14" w.c.	2500	2300	2000	-	-	-	
1 psi	4200	4000	3600	2500	-	-	
2 psi	5700	5500	5300	4000	4500	-	
3 psi	7300	7000	6000	4900	5200	4000	
5 psi	8000	8000	8400	7800	8000	7500	
10 psi	9000	9500	10000	9500	9700	9000	
15 psi	9000	9500	11000	11500	11500	11000	
8" w.c.	2000	15000	-	-	-	-	1¼" Model 122-8
14" w.c.	3500	3000	2200	-	-	-	
1 psi	5000	4800	4000	3600	-	-	
2 psi	7300	7000	6400	5700	6000	-	
3 psi	9000	8700	8000	6900	7200	6300	
5 psi	10000	9800	9500	8800	9100	8100	
10 psi	15000	15700	15200	14500	14900	13800	
15 psi	15000	15700	15800	15000	15000	14000	
INLET PRESSURE	SET POINT 5" w.c.	SET POINT 7" w.c.	SET POINT 11" w.c.	SET POINT 18" w.c.	SET POINT 28" w.c.	SET POINT 2 psi	REGULATOR SIZE AND MODEL
	RED SPRING 1" w.c. DROOP	BLUE SPRING 1" w.c. DROOP	GREEN SPRING 2" w.c. DROOP	ORANGE SPRING 2" w.c. DROOP	ORANGE SPRING 3" w.c. DROOP	BLACK SPRING ¼" psi DROOP	
8" w.c.	4000	3000	-	-	-	-	1½" Model 122-12
14" w.c.	4900	4500	3700	-	-	-	
1 psi	6600	6500	6000	5750	-	-	
2 psi	10500	10000	9800	9000	9500	-	
3 psi	12000	12000	11100	10000	10500	8900	
5 psi	14500	14500	13900	12000	12700	10000	
10 psi	16000	16000	15000	13500	14000	12700	
15 psi	18000	18000	19000	19000	20000	18000	
8" w.c.	5000	4000	-	-	-	-	2" Model 122-12
14" w.c.	8800	8000	6600	-	-	-	
1 psi	12200	12000	11500	10700	-	-	
2 psi	18200	18000	17300	16500	16900	-	
3 psi	25000	25000	24000	22300	23000	18000	
5 psi	32000	32000	30000	28100	29000	27400	
10 psi	38000	38000	35000	32200	33000	30000	
15 psi	38000	38000	40000	39000	40000	36000	
8" w.c.	5500	4500	-	-	-	-	2½" Model 122-12
14" w.c.	9600	9000	7300	-	-	-	
1 psi	13600	13400	12100	11300	-	-	
2 psi	20700	20000	19200	18200	18800	-	
3 psi	27000	27000	26500	24900	25400	20000	
5 psi	35000	35000	32000	30200	31000	29000	
10 psi	42000	42000	39000	36000	37000	33000	
15 psi	48000	48000	48000	42000	45000	39900	

**NOTE:** The above performance data is based on normal testing at 70°F flowing temperature. Changes in performance can occur at extreme low flowing temperatures.

### Overpressurization Protection

Protect the downstream piping system and the regulator’s low pressure chambers against overpressurization due to possible regulator malfunction or failure to achieve complete lock up.

The allowable outlet pressure is the lowest of the maximum pressures permitted by federal codes, state codes, Sensus Metering Systems IN-G-REG-1498, or other applicable standards.

The method of protection can be a relief valve, monitor regulator, shutoff device, or similar mechanism.

### Materials of Construction

- Body ..... Cast Iron
- Diaphragm Case ..... Die Cast Aluminum Alloy
- Stem Bushing and Plate ..... Plated Steel
- Main and Seal Diaphragms ..... Buna-N with (Vitron Not Available) Nylon Fabric Insert
- Orifice ..... Cast Iron (1½" and 2½" Model 122)
- Orifice ..... Brass (1" and 1¼" Model 122)
- Valve ..... Plated Steel with Molded Buna-N Soft Seat
- Stem ..... Plated Steel
- Diaphragm Pans, Collars and Washers ..... Plated Steel
- O-Rings and Tetra Seals ..... Buna-N
- Adjustment Spring Button ..... Zinc Die Casting (1" and 2½" Model 122)
- Seal Cap, 243-8HP ..... Zinc Die Casting (1" through 2½")

### Full Open Capacity

Capacity of the Model 122 in the wide-open position can be calculated using the following formula and K factors:

1.  $Q = K\sqrt{P_o(P_i - P_o)}$   
 Q = Full open capacity in SCFH of 0.6 specific gravity natural gas).  
 P<sub>i</sub> = **Absolute** inlet pressure (psia)  
 P<sub>o</sub> = **Absolute** outlet pressure (psia)
2. K Factors =
  - 1" Model 122-8 ..... K = 1400
  - 1¼" Model 122-8 ..... K = 1750
  - 1½" Model 122-12 ..... K = 2750
  - 2" Model 122-12 ..... K = 4750
  - 2½" Model 122-12 ..... K = 5250

Remember, at the above full open capacities the droop is significantly greater than specified in the capacity tables.

When checking 122 regulator capacity to provide adequate relief valve capacity, use the full open capacity. Do not use 122 capacity from the tables.

### Other Gases

Standard Model 122 regulators are most widely used on natural gas. However, they perform equally well on LP gas, nitrogen, dry CO<sub>2</sub>, and air.

For capacities, multiply the table values on page 4 by the following correction factors:

Type of Gas	Correction Factor
Air (Specific Gravity 1.0)	0.77
Propane (Specific Gravity 1.53)	0.63
1350 BTU Propane-Air Mix (Specific Gravity 1.20)	0.71
Nitrogen (Specific Gravity 0.97)	0.79
Dry Carbon Dioxide (Specific Gravity 1.52)	0.63

For other non-corrosive gases, use the following formula:

$$\text{CORRECTION FACTOR} = \sqrt{\frac{0.60}{\text{Specific gravity of the gas}}}$$

For use with gases not listed above, please contact your Sensus representative or industrial distributor for recommendations.

### CAUTION

It is the user’s responsibility to assure that all residential service regulator vents and/or vent lines exhaust to a non-hazardous location away from any potential sources of ignition. Refer to Sensus Bulletin IN-G-REG-1329 for more detailed information.

### 122 Variations

The following variations of the Model 122 are also available:

#### Atmospheric Regulator/Zero Governor

- All pipe sizes through 2½".
- Set-point pressures:  
 -1" w.c. to +1½" w.c ..... (1" through 2½" Model 122)

#### Differential Regulator

- All pipe sizes through 2½".
- Set points to maximum differential of 1 psi.

#### Back Pressure Regulator/Relief Valve

- All pipe sizes through 2½".
- Set-point pressures:  
 3" w.c. to 2 psi ..... (1" and 1¼" Model 122-8)  
 3" w.c. to 1¾" psi ..... (1½" and 2½" Model 122-12)

For more complete information refer to IN-G-REG-1329. For other variations or special applications, please contact your Sensus Representative or industrial distributor.

### Larger Sizes

The 122 is manufactured in 1" through 2½" pipe sizes only. For larger sizes, see the 3" and 4" Model 121.

### Metrication

Use the following for metric conversions:

std. meters<sup>3</sup>/hr. x 35.31 = std. ft.<sup>3</sup>/hr. (SCFH)  
 std. ft.<sup>3</sup>/hr. (SCFH) x 0.0283 = std. meters<sup>3</sup>/hr.

kilograms/centimeter<sup>2</sup>(kg/cm<sup>2</sup>) x 14.22 = psig  
 psig x 0.0703 = kilograms/centimeter<sup>2</sup>(kg/cm<sup>2</sup>)

kilopascals (kPa) x 0.145 = psig  
 psig x 6.90 = kilopascals (kPa)

bars x 14.50 = psig  
 psig x 0.69 = bars

millimeters water (mm H<sub>2</sub>O) x .0394 = in. w.c.  
 in. w.c. x 25.4 = millimeters water (mm H<sub>2</sub>O)

millimeters mercury (mm Hg) x 0.535 = in. w.c.  
 in. w.c. x 1.868 = millimeters mercury (mm Hg)

### How to Order

Specify:


1. Model number
2. Pipe size
3. Inlet pressure
4. Outlet pressure
5. Capacity required, SCFH
6. Kind of gas (natural gas, propane, air, etc.)



### CAUTION

Turn gas on very slowly. If an outlet stop valve is used, it should be opened first. Do not overload the diaphragm with a sudden surge of inlet pressure. Monitor the outlet pressure during start-up to prevent an outlet pressure overload.

### Dimensions

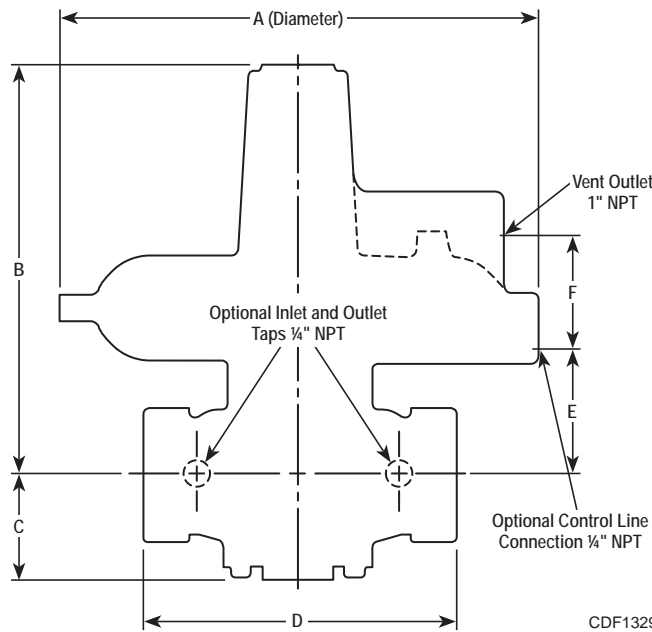

CDF1329-035

	A	B	C	D	E	F	SHPG. WT.
1" NPT	10 1/4"	11 5/8"	1 1/8"	5 3/4"	2 1/2"	3 7/16"	15 lbs.
1 1/4" NPT	10 1/4"	11 5/8"	1 1/8"	5 3/4"	2 1/2"	3 7/16"	15 lbs.
1 1/2" NPT	14"	13"	2 3/8"	7 1/2"	3 15/16"	3 7/16"	28 lbs.
2" NPT	14"	13"	2 3/8"	7 1/2"	3 15/16"	3 7/16"	28 lbs.
2 1/2" NPT	14"	13"	2 3/8"	8 1/4"	3 15/16"	3 7/16"	30 lbs.



# Model 122 Industrial Combustion Regulators

Construction and Design Features

## Authorized Distributor:

All products purchased and services performed are subject to Sensus' terms of sale, available at either <http://na.sensus.com/TC/TermsConditions.pdf> or 1-800-METER-IT. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED. © 2013 Sensus.